



**8540 Koffee King®
Two Warmer In-Line
Automatic Coffee Brewer**
(with Hot Water Faucet)

**8541 Koffee King
Two Warmer In-Line
Automatic Coffee Brewer**
(without Hot Water Faucet)

Lo Profile® brewing At less than 17" tall, the Lo Profile is small in stature but big on capacity. It also features a front-mounted hot water faucet, allowing the operator to make quick draws without affecting the brewing cycle. Like all Bloomfield products, this proven, efficient brewing system is designed to take advantage of the finest electrical components and has the lowest service cost in the industry for this type of brewer.

Features



- Exclusive design provides easy access to components for quick service.
- Water volume adjustment can be made with ease, no panels to remove or tools required.
- Ready-to-Brew light indicates the proper water temperature to help eliminate the guesswork in brewing.
- Built in pour over feature provides flexibility.
- Premium quality thermostat has a full-length stainless steel sensing bulb that recognizes water temperature extremely accurately and cycles less frequently.
- Superior sprayhead design spreads water over the coffee grounds, creating agitation and a floating action that completely saturates the coffee to capture the full, rich essence of every bean.
- Unique water valve with built-in flow control and strainer assures consistent operation at 20-90 p.s.i.
- One-piece drawn stainless steel water tank has a superior design for extended life.
- Independent front-mounted hot water faucet (model 8540) allows drawing of hot water without affecting coffee taste or brewing cycle.
- Two warming stations with porcelain enameled warmer plates position decanters securely and, with no exposed screwheads, will not scratch or scrape decanters.
- High quality easy to clean stainless steel construction.





Specifications

DIMENSIONS: INCH
(MM)

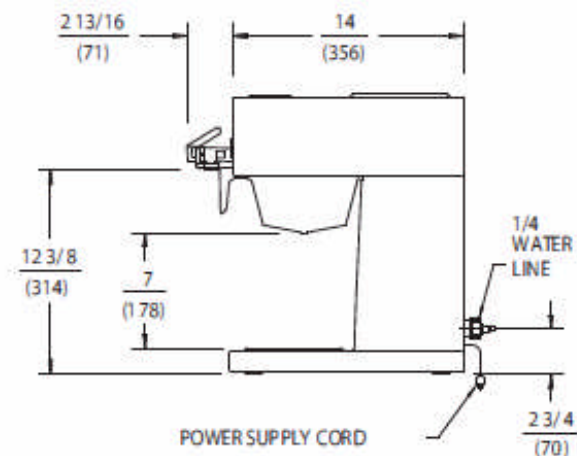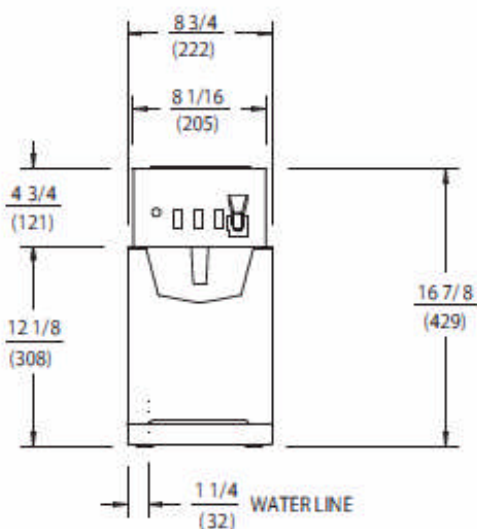

SPECIFICATIONS:

MODELS	WATTS	VOLTS	AMPS	PHASE	POWER SUPPLY CORD
8540	1700	120	14.2	SINGLE	NEMA 5-15P
8540AU, PI, KO	2000	220-240	8.3	SINGLE	SUPPLIED
8540CA	1500	120	12.5	SINGLE	NEMA 5-15P
8540EU, UK	2000	220-240	8.3	SINGLE	SUPPLIED
8541	1700	120	14.2	SINGLE	NEMA 5-15P
8541AU, KO	1700	220-240	7.7	SINGLE	SUPPLIED
8541CA	1500	120	12.5	SINGLE	NEMA 5-15P
8541EU, UK	2000	220-240	8.3	SINGLE	SUPPLIED

Meets Canadian standards. denotes CE approved models. denotes export products.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See operation and maintenance manual for complete instructions.